

**FRENI ELETTRICITÀ
NEGATIVI A MOLLE
Serie MES**

**LINING ELECTROMAGNETIC
SPRING LOADED BRAKES
Model MES**


PRESTAZIONI (24VCC) • PERFORMANCES (24 VDC)

| tipo - size | coppia – torque (Nm) | potenza – power (W) | giri/min - RPM | peso – weight (kg) |
|-------------|-------------------------|------------------------|----------------|-----------------------|
| MES 110 | 25 | 40 | 3500 | 4,3 |
| MES 135 | 60 | 42 | 3000 | 6 |
| MES 160 | 90 | 48 | 2500 | 9 |
| MES 195 | 150 | 65 | 2000 | 14 |

DIMENSIONI (mm) • DIMENSIONS (mm)

| tipo - size | A | B | C | D | E | F | G | H | L H7 |
|-------------|-----|----|----|----|--------|----|----|-----|------|
| MES 110 | 110 | 70 | 20 | 50 | 3 x M5 | 20 | 49 | 52 | 40 |
| MES 135 | 135 | 76 | 25 | 54 | 3 x M6 | 21 | 53 | 65 | 50 |
| MES 160 | 160 | 80 | 45 | 83 | 4 x M6 | 26 | 60 | 87 | 65 |
| MES 195 | 195 | 85 | 45 | 66 | 6 x M6 | 30 | 55 | 105 | 90 |

DENOMINAZIONE PARTI • PARTS NAME

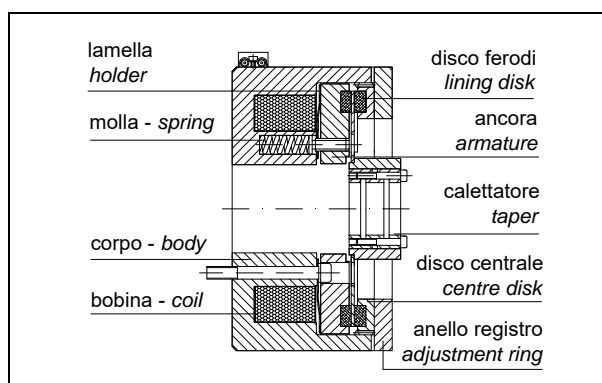

ESEMPIO MONTAGGIO • MOUNTING EXAMPLE

