

**GRUPPI FRENO-FRIZIONE
PNEUMATICI
Serie GEM - S**

**PNEUMATIC
BRAKE-CLUTCH UNITS
Model GEM - S**


PRESTAZIONI (5,5 Bar) • PERFORMANCES (5,5 bar)

tipo - size	coppia freno brake torque (Nm)	coppia frizione clutch torque (Nm)	giri/min RPM max	volume aria air volume (l)	J corpo J body (kgm ²)	J dischi J discs (kgm ²)	peso weight (kg)
GEM 025-S	160	240	2.500	0,07	0,019	0,008	9
GEM 050-S	330	570	2.300	0,15	0,055	0,025	16
GEM 100-S	650	1.050	1.700	0,24	0,175	0,063	32
GEM 200-S	1.400	2.100	1.400	0,40	0,525	0,200	58
GEM 400-S	2.800	4.500	1.150	0,60	1,500	0,575	85
GEM 500-S	3.400	5.400	1.100	0,70	2,100	0,825	120
GEM 600-S	4.400	6.700	950	0,90	3,250	1,175	135

DIMENSIONI (mm) • DIMENSIONS (mm)

tipo - size	A max	B	C	D	E	F	G	H	K	I	L	M	N	n x P	Q	Q'	R	S	T	T'	U
GEM 025-S	38	220	188	85	51	9	85	16	-5	28	61	58	17	2 x 6	232	250	20	11	280	296	4,5
GEM 050-S	45	275	236	110	63	11	104	22	-6	45	70	66	19	2 x 7	296	315	20	11	352	371	5,5
GEM 100-S	60	352	304	136	85	14	115	22	5	45	70	83	22	2 x 10	364	390	20	11	418	445	5,5
GEM 200-S	80	437	380	165	105	17	150	30	0	60	102	100	27	2 x 12	445	495	25	16	525	570	5,5
GEM 400-S	90	535	465	182	115	19	160	40	6	80	119	125	32	2 x 15	550	610	25	20	640	700	5,5
GEM 500-S	100	570	497	210	130	19	190	40	11	80	125	140	37	2 x 18	575	645	25	20	670	740	5,5
GEM 600-S	105	620	543	214	135	19	198	40	4	80	126	145	36,5	2 x 18	640	695	25	20	740	790	5,5

NOME PARTICOLARI • PARTS NAME

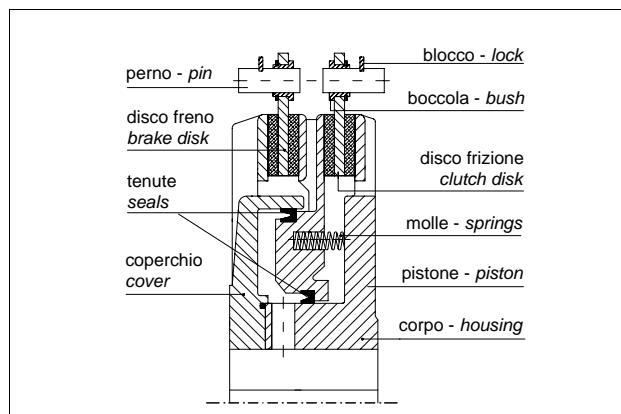

ESEMPIO MONTAGGIO • MOUNTING EXAMPLE

